

TopAdjust™ Mirror Mounts

Optics

Lenses

Mirrors & Beamsplitters

Prisms & Polarizers

Filters

Pinholes

- 1.5 Inch, 2 Inch and 3 Inch Square
- Patented low backlash double ball bearing design
- Both tip and tilt controls are top mounted to avoid beam contact
- Lockable adjusters - ideal for OEM applications



Opto-mechanics

Breadboards & Rails


Mounting Hardware

Mirror & Component Mounts


Manual Micro Positioners

Motorized Positioners

37-4785/22-8668/37-4793/22-8676
TopAdjust™ Mirror Mount, 1.5 and 2 inch

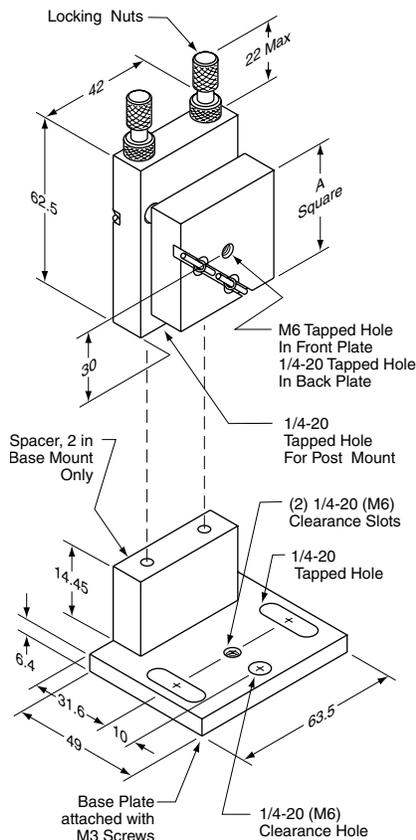

37-4801/22-8684
TopAdjust™ Mirror Mount, 3 inch

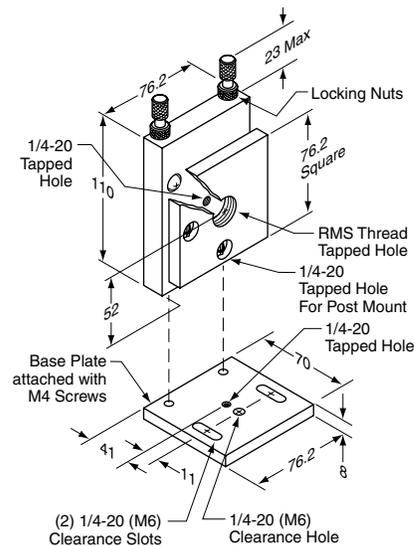

A high resolution unique adjustment system with vertically-mounted controls makes these kinematic mirror mounts particularly valuable for use where access is restricted or where it is necessary to keep the operator's hands away from the optical path, as with high power laser systems. The fine pitch adjusting screws are fitted with knurled locking rings to prevent accidental movement once set in place.

TopAdjust™ Mirror Mounts are available with bases for metric and inch table mounting, or without bases for post-mounted applications. Where bases are fitted, these may be reversed allowing the mirror to face the inside or outside of the brackets.

Mirrors may be quickly and easily bonded to the face plates of the mirror mounts using self-adhesive pads which are supplied.

TopAdjust™ Mirror Mounts

Catalog Number	Description	A (inch)	Price US
37-4793	TopAdjust Mirror Mount, 2 inch Square Post Mounted	2.0	\$149.00
22-8676	TopAdjust Mirror Mount, 2 inch Square Base Mounted	2.0	\$159.00
37-4801	TopAdjust Mirror Mount, 3 inch Square Post Mounted	3.0	\$249.00
22-8684	TopAdjust Mirror Mount, 3 inch Square Base Mounted	3.0	\$259.00